

Plašči za poljedelska vozila Agricultural tyres

Koda	Dimenzija plašča	Trdnost karkase	Oznaka dezena TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev kg		Pritisk polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
							Pogonsko kolo	Gnano kolo			
Code	Tyre dimension	Carcass rigidity PR	Tread pattern designation TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Drive wheel	Free Roll wheel	Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
510258	13x5.00-6	4PR	B12 TL/TT	119	334	3.50-6	185	185	2.25	20	4.00-6
75654	4.00-8	2PR	B12 TT	105	425	3.00	109	155	1.50	30	3.50/4.00-8
54592	4.00-8	4PR	B12 TT	105	425	3.00	160	230	2.75	30	3.50/4.00-8
542215	16x6.50-8	4PR	B64 TL/TT	165	405	5.375	200	280	1.90	30	16x6.50/7.50-8
570628	16x6.50-8	8PR	B64 TL/TT	163	405	5.375	325	450	4.25	30	16x6.50/7.50-8
51448	4.00-10	2PR	B12 TT	109	470	3.00	128	185	1.50	30	4.00-10
81029	4.00-10	4PR	B12 TT	109	470	3.00	185	265	2.75	30	4.00-10
54664	4.00-12	4PR	B12 TT	109	526	3.00	212	300	2.75	30	4.00-12
54872	5.00-12	2PR	B12 TT	145	570	4.00	180	257	1.20	30	5.00-12
81014	5.00-12	4PR	B12 TT	145	570	4.00	265	375	2.25	30	5.00-12
63111	3.50-6	4PR	B16 TT	96	353	2.50	115	165	3.00	30	4.00-6
81181	3.50-8	4PR	B16 TT	96	395	2.50	121	185	3.00	30	3.50/4.00-8
63865	5.00-10	4PR	B16 TT	129	520	3.00	243	355	2.25	30	5.00-10
78781	4.00-10	2PR	B17 TT	111	460	3.50	140	195	1.50	30	4.00-10
66261	5.0-10	2PR	B17 TT	135	510	3.50	180	257	1.25	30	5.00-10
65257	5.0-10	4PR	B17 TT	135	510	3.50	257	365	2.25	30	5.00-10
75213	6.50/80-12	4PR	B18 TT	165	604	5.00	355	500	2.40	30	5.00-12
63110	3.50-6	4PR	B15 TT	96	343	2.50	115	165	3.00	30	4.00-6
520420	3.50-6	4PR	B15 TT	96	388	6.00	/	185	3.00	30	4.00-6
63723	3.50-8	4PR	B15 TT	96	388	2.50	/	185	3.00	30	3.50/4.00-8
530507	18.5x8.50-8	6PR	B63 TL	212	462	7.00-8	300	426	3.50	30	18x8.50/9.50-8
531826	18.5x8.50-8	12PR	B63 TL	212	462	7.00-8	425	600	6.30	30	18x8.50/9.50-8



Plašči za samokolnice in vozičke Tyres for wheelbarrows and carts



Koda	Dimenzija plašča	Trdnost karkase	Oznaka dezena TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev (kg)	Pritisk polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
Code	Tyre dimension	Carcass rigidity PR	Tread pattern designation TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load (Kg)	Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
512107	4.00-6	2PR	V-5501 TT	102	348	2.50-6	150	2.10	30	4.00-6
512113	4.00-6	4PR	V-5501 TT	102	348	2.50-6	210	2.50	30	4.00-6
512114	4.00-6	6PR	V-5501 TT	102	348	2.50-6	270	3.50	30	4.00-6
512116	3.50-8	2PR	V-5501 TT	88	370	2.50-8	150	2.10	30	3.50/4.00-8
512117	3.50-8	4PR	V-5501 TT	88	370	2.50-8	180	2.50	30	3.50/4.00-8
521304	4.00/4.80-8	2PR	V-5501 TT	116	410	3.75-8	220	2.50	30	3.50/4.00-8
512119	4.00/4.80-8	4PR	V-5501 TT	116	410	3.75-8	220	2.50	30	3.50/4.00-8
65458	4.00-6	6PR	B11 TT	105	360	2.50-6	243	4.25	30	3.50/4.00-6
79778	3.50-8	4PR	B11 TT	96	388	2.50-8	185	3.00	30	3.50/4.00-8
74161	4.00-8	4PR	B11 TT	105	410	3.00-8	230	2.75	30	3.50/4.00-8



Plašči za delovna vozila Implement and garden tyres

Koda	Dimenzija plašča	Trdnost karkase	Oznaka dezena TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev (kg)	Pritisk polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
Code	Tyre dimension	Carcass rigidity PR	Tread pattern designation TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load (Kg)	Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
79755	11x7-4	4PR	B19 TT	183	270	6.00	425	3.50	30	
516079	13x5.00-6	4PR	B19 TL/TT	121	320	3.50	185	2.25	20	4.00-6
547466	13x5.00-6	8PR	B19 TL/TT	121	320	3.50	300	4.25	20	4.00-6
508429	15x6.00-6	6PR	B19 TL/TT	155	355	4.50	355	3.00	20	15x6.00-6
508382	16x6.50-8	6PR	B19 TL/TT	165	405	5.375	335	3.00	20	16x6.50/7.50-8
522621	16x6.50-8	10PR	B19 TL/TT	165	405	5.375	412	3.75	20	16x6.50/7.50-8
574309	16x6.50-8	12PR	B19 TL/TT	165	405	5.375	450	4.00	20	16x6.50/7.50-8
514488	13x5.00-6	4PR	G1 TL/TT	122	320	3.50	185	3.00	20	4.00-6
548912	18x8.50-8	6PR	G1 TL/TT	214	450	7.00	425	2.75	20	18x8.50/9.50-8


Plašči za ultralahka letala Tyres for ultralight aircrafts



Koda	Dimenzija plašča	Oznaka nosilnosti, simbol hitrosti	Oznaka dezena TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev (Kg)	Pritisk polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
Code	Tyre dimension	Load index, speed symbol	Tread pattern designation TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load (Kg)	Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
530465	4.00-6	66L	B11 TT	105	360	2.50-6	300	4.25	120	4.00-6
534178	4.00-4	66L	B11 TT	114	313	3.00-4	300	5.00	120	4.00-4

Plašči za prikolice Tyres for trailers

Koda	Dimenzija plašča	Oznaka nosilnosti, simbol hitrosti	Oznaka dezena TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev (Kg)	Pritisk polnjenja (bar)	Maks. hitrost (km/h)
Code	Tyre dimension	Load index, speed symbol	Tread pattern designation TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load (Kg)	Inflation pressure (bar)	Max speed (km/h)
573368	3.50-8	46J (4PR)	B13 TT	92	386	2.50	170	2.5	100
573354	4.00-8 C	71J (6PR)	B13 TT	108	415	3.00	345	4.25	100
573356	4.00-8 C	66N (4PR)	B13 TL/TT	108	415	3.00	300	3.5	140
573390	3.50-10	59J REINF	B14 TT	92	437	2.50	243	3.25	100
573384	4.00-10C	69J (4PR)	B14 TL/TT	108	466	3.00	325	3.5	100
573385	4.00-10C	74J (6PR)	B14 TL/TT	108	466	3.00	375	4.25	100
508369	4.80/4.00-8	70N (6PR)	B61 TL	115	415	2.50-8	335	5.00	140
508795	4.50-10 M+S	76N (6PR)	B61 TL	135	495	3.50-10	400	4.25	140
513026	5.00-10 M+S	72N (4PR)	B61 TL	149	524	3.50-10	355	3.50	140
508797	5.00-10 M+S	79N (6PR)	B61 TL	149	525	3.50-10	437	4.25	140
548155	145-10 M+S	79N (6PR)	B61 TL	147	504	4.00-10	437	4.25	140
528359	18X8.0-10 (195/50 B10)	98N	B62 TL	188	453	6.00-10	750	6.0	140
549428	195/55-10C	98/96N	B62 TL	205	468	7.00-10	750/710	6.25	140

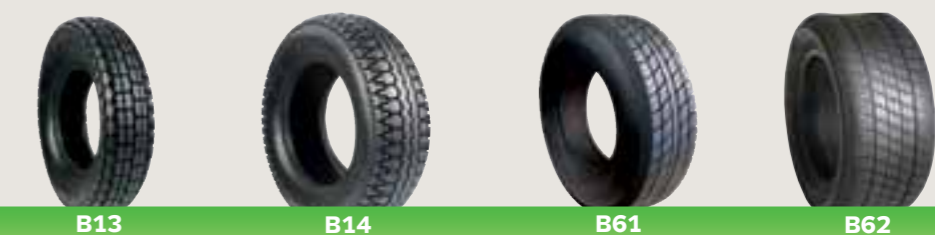

Zračnice Tubes

Koda	Dimenzija zračnice	Vrsta ventila
Code	Tube size	Valve type
576859	260x85/3.00-4	DIN 7777
576978	4.00-4	JS87 90/90
576849	4.00-6	TR13
576863	4.00-6	JS87 90/90
576952	16x5.00-6	JS87
576953	13x5.00-6	JS89
576851	3.50/4.00-8	TR13
576865	3.50/4.00-8	JS87 90/90
576980	5.00-8	TR13
576981	5.00-8 HEAVY DUTY	TR13
576852	4.00-10	TR13
576862	5.00-10	TR13
576876	4.00-10	JS87 90/90
576853	4.00-12	TR13
576854	5.00-12	TR13
576855	15x6.00-6	TR13
576856	16x6.50/7.50-8	TR13
576857	18x8.50/9.50-8	TR13



POIŠČITE NAJBLIŽJEGA PRODAJALCA FIND YOUR NEAREST DEALER



NA SPLETU / ONLINE
www.savatech.si
www.savatech.eu



PO TELEFONU / BY CALLING
Ga./ Mrs. Saša Krašovec
+386 4 206 51 23
G. / Mr. Anže Pintar
+386 4 206 58 75




**PO ELEKTRONSKI POŠTI /
BY SENDING E-MAIL**
sasa.krasovec@savatech.si
anze.pintar@savatech.si



Savatech d.o.o.

Škofjeloška cesta 6, 4502 Kranj, Slovenija

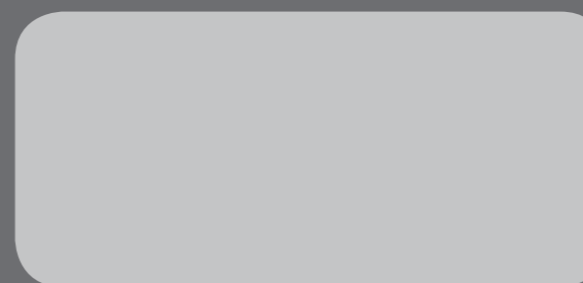

Izdaja / Edition 2016



PLAŠČI za poljedelska, delovna vozila,
samokolnice, vozičke, prikolice in
ultralahka letala

TYRES for agricultural, implement and
garden vehicles, wheelbarrows, carts,
trailers and ultralight aircrafts